

# Plastic Strip Store

## Construction Instructions

[www.ebmahobby.co.uk](http://www.ebmahobby.co.uk)



## Introduction

The EBMA Plastic Strip Store is produced in 3mm MDF. As such normal DIY woodwork procedures can be applied to them. The parts are cut by a laser cutter which results in smoke marks on the surface of the wood. One side of the wood will have slight marks and the other will be more pronounced. Some parts are symmetrical and you are therefore able to choose the visual effect you wish. For asymmetrical parts if you wish to remove the smoke marks then fine sandpaper may be used (use a sanding block, not just the paper on its own).

Where glue is required during assembly a good quality wood glue (PVA) should be used. When wiping the excess away wherever possible wipe it towards the burnt edge as this marks less.


Dry fitting components prior to gluing is highly recommended, i.e. compulsory! You should also use an engineers' square during construction to ensure that everything goes together absolutely square.

Whilst parts are drying it can be handy to hold them in place with masking tape. This can be used to help keep gaps closed.


# Construction

## Shell


1. Place the base

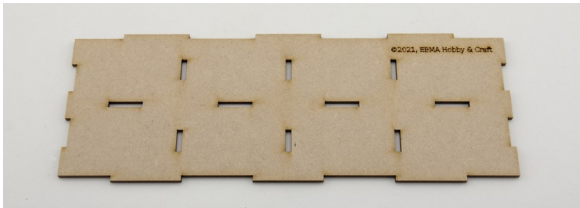


onto a flat surface.

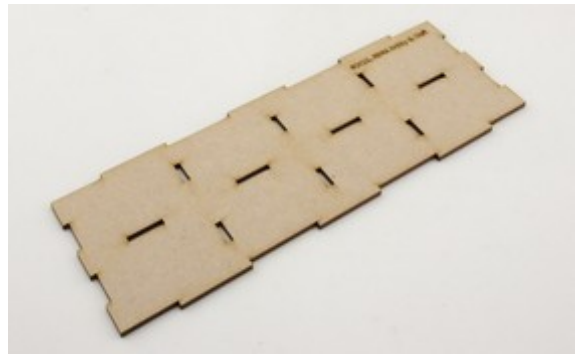


2. Position the smaller inserts

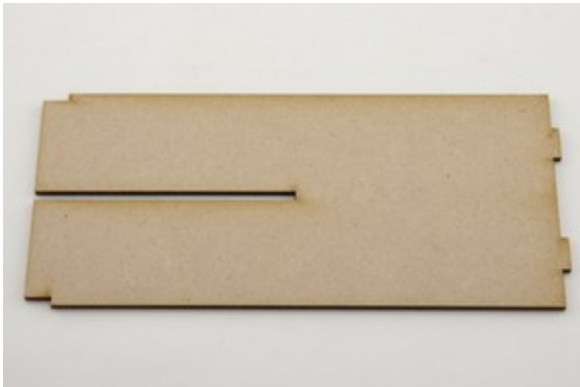

into the base. There is no requirement to glue these.

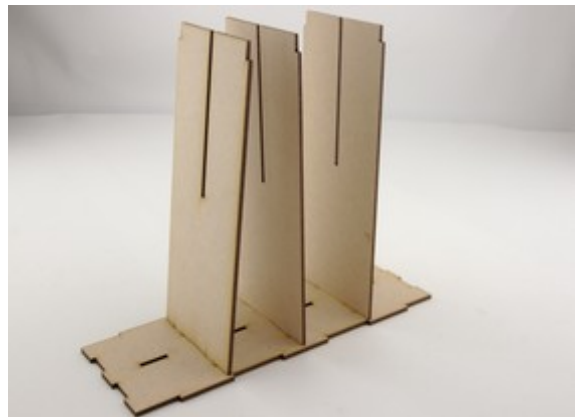

3. Drop the larger insert

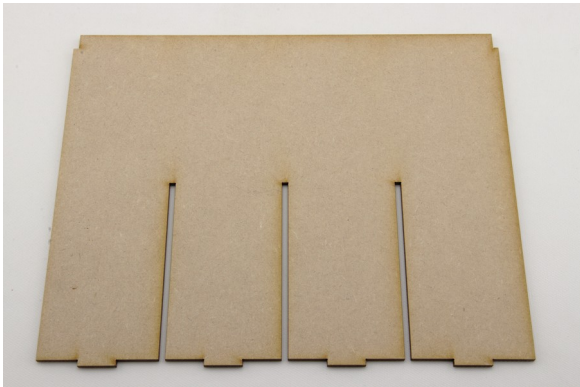

over the smaller inserts and into the base. There is no requirement to glue this.




4. Glue one side on ensuring everything is



square.




5. Glue on one end

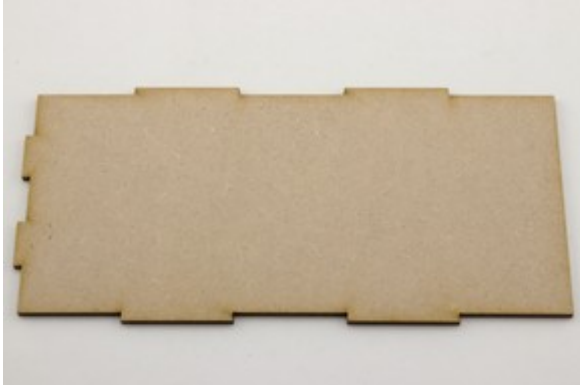

6. Repeat steps 4 and 5 for the remaining end and side.

7. Glue and insert the two smaller locking

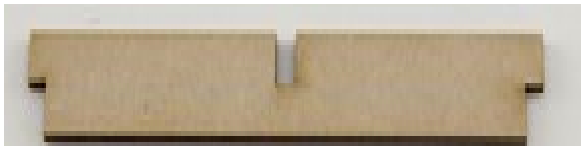

pieces into either end of the store.



8. Glue and insert the two longer locking



pieces into either side of the store.  
The store is now complete. Ensure that  
all of the glue is dry before using it.

